
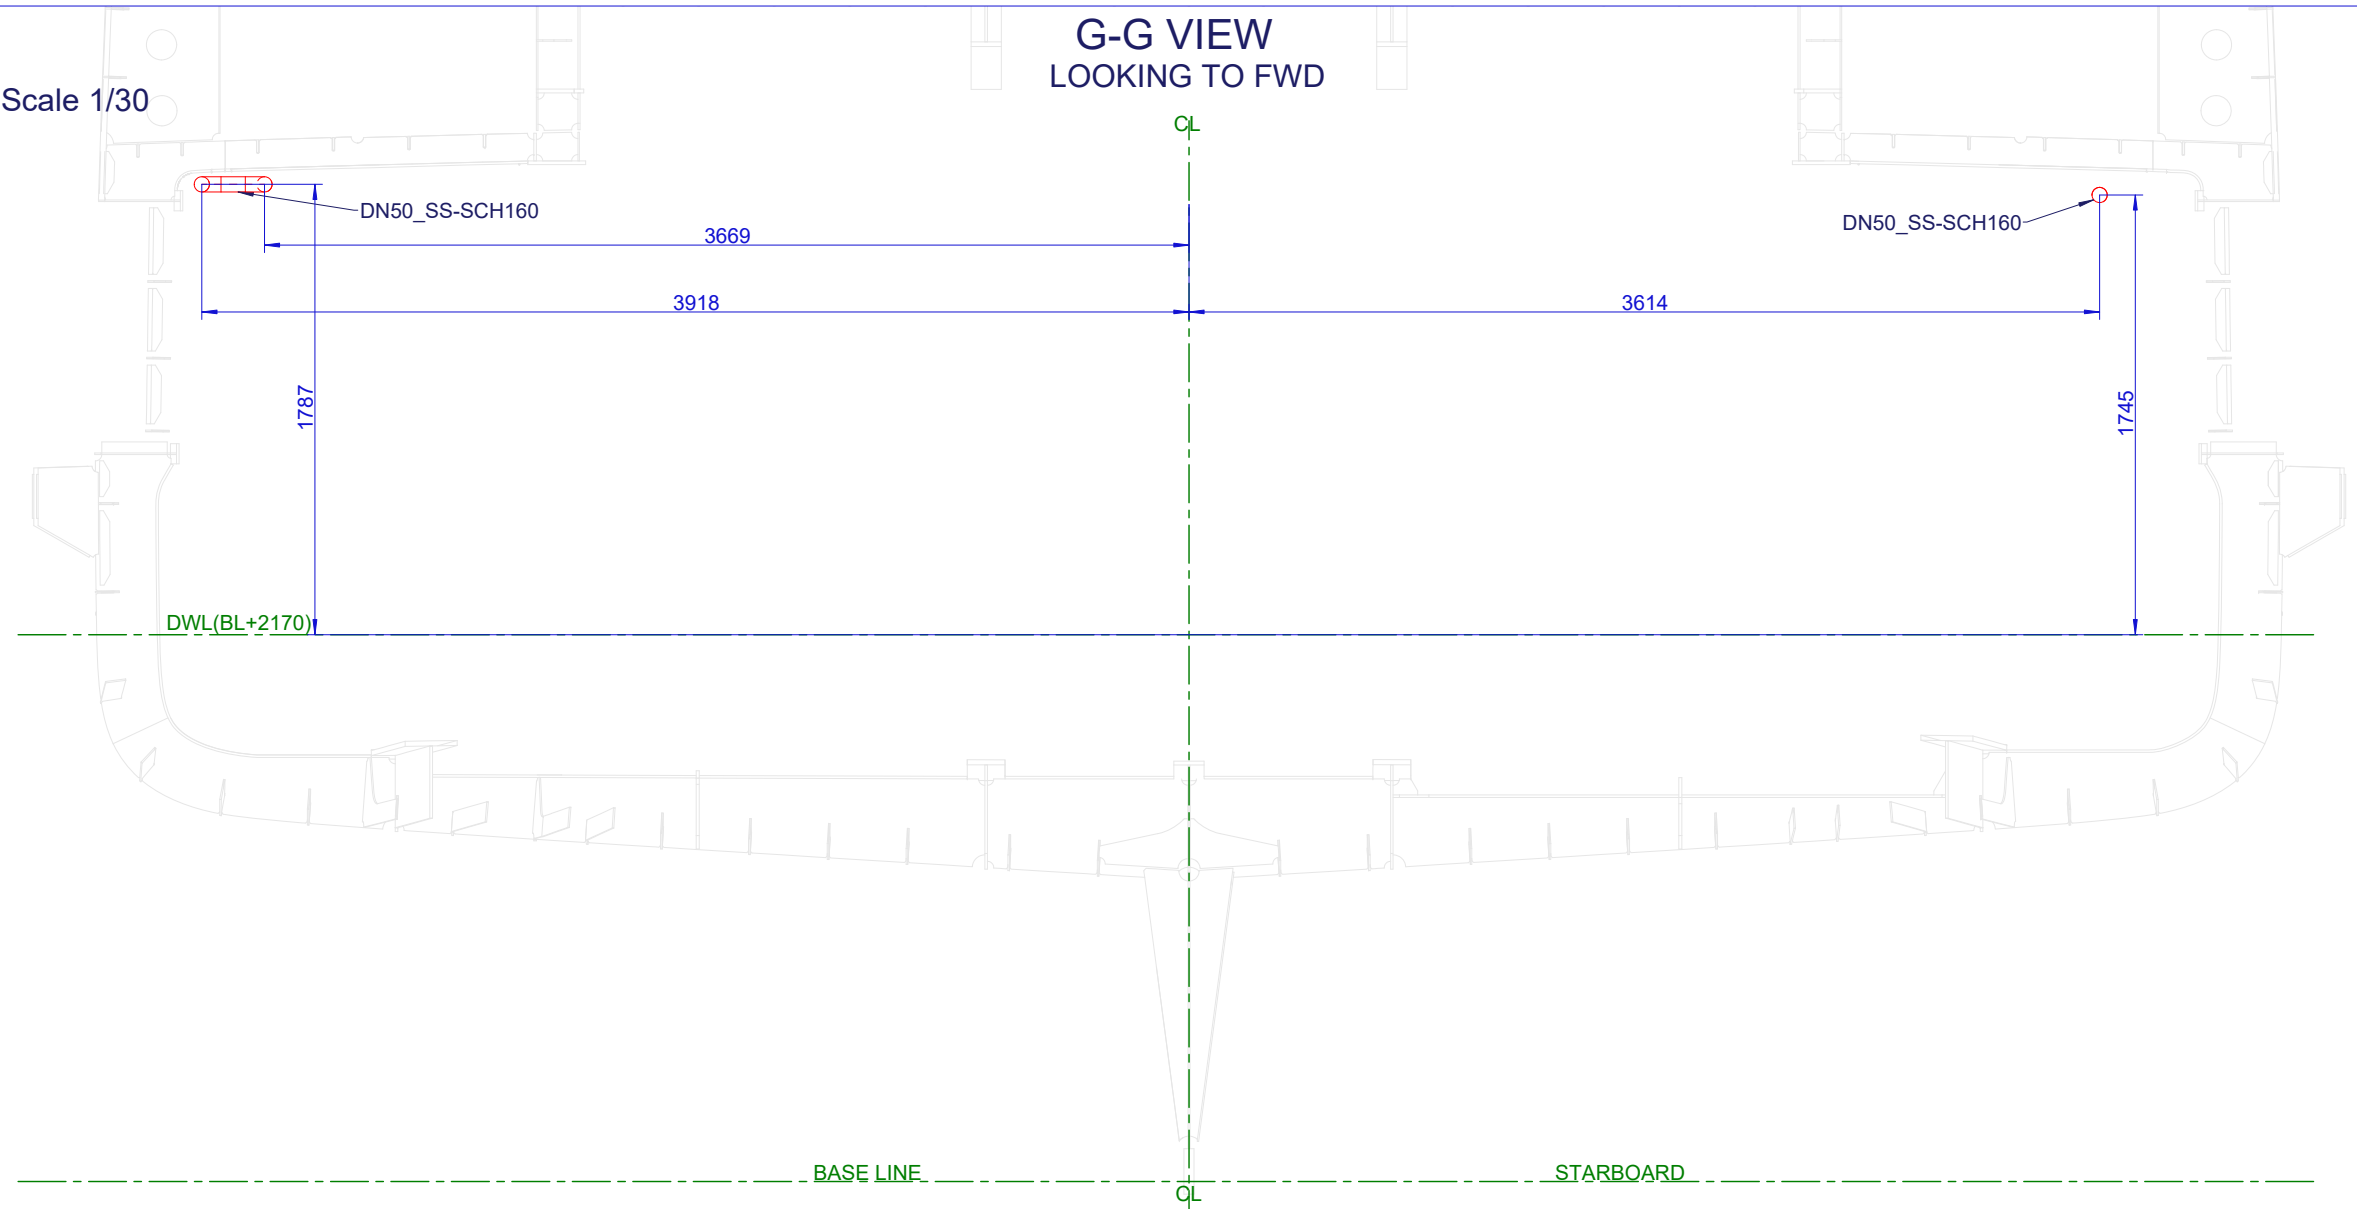
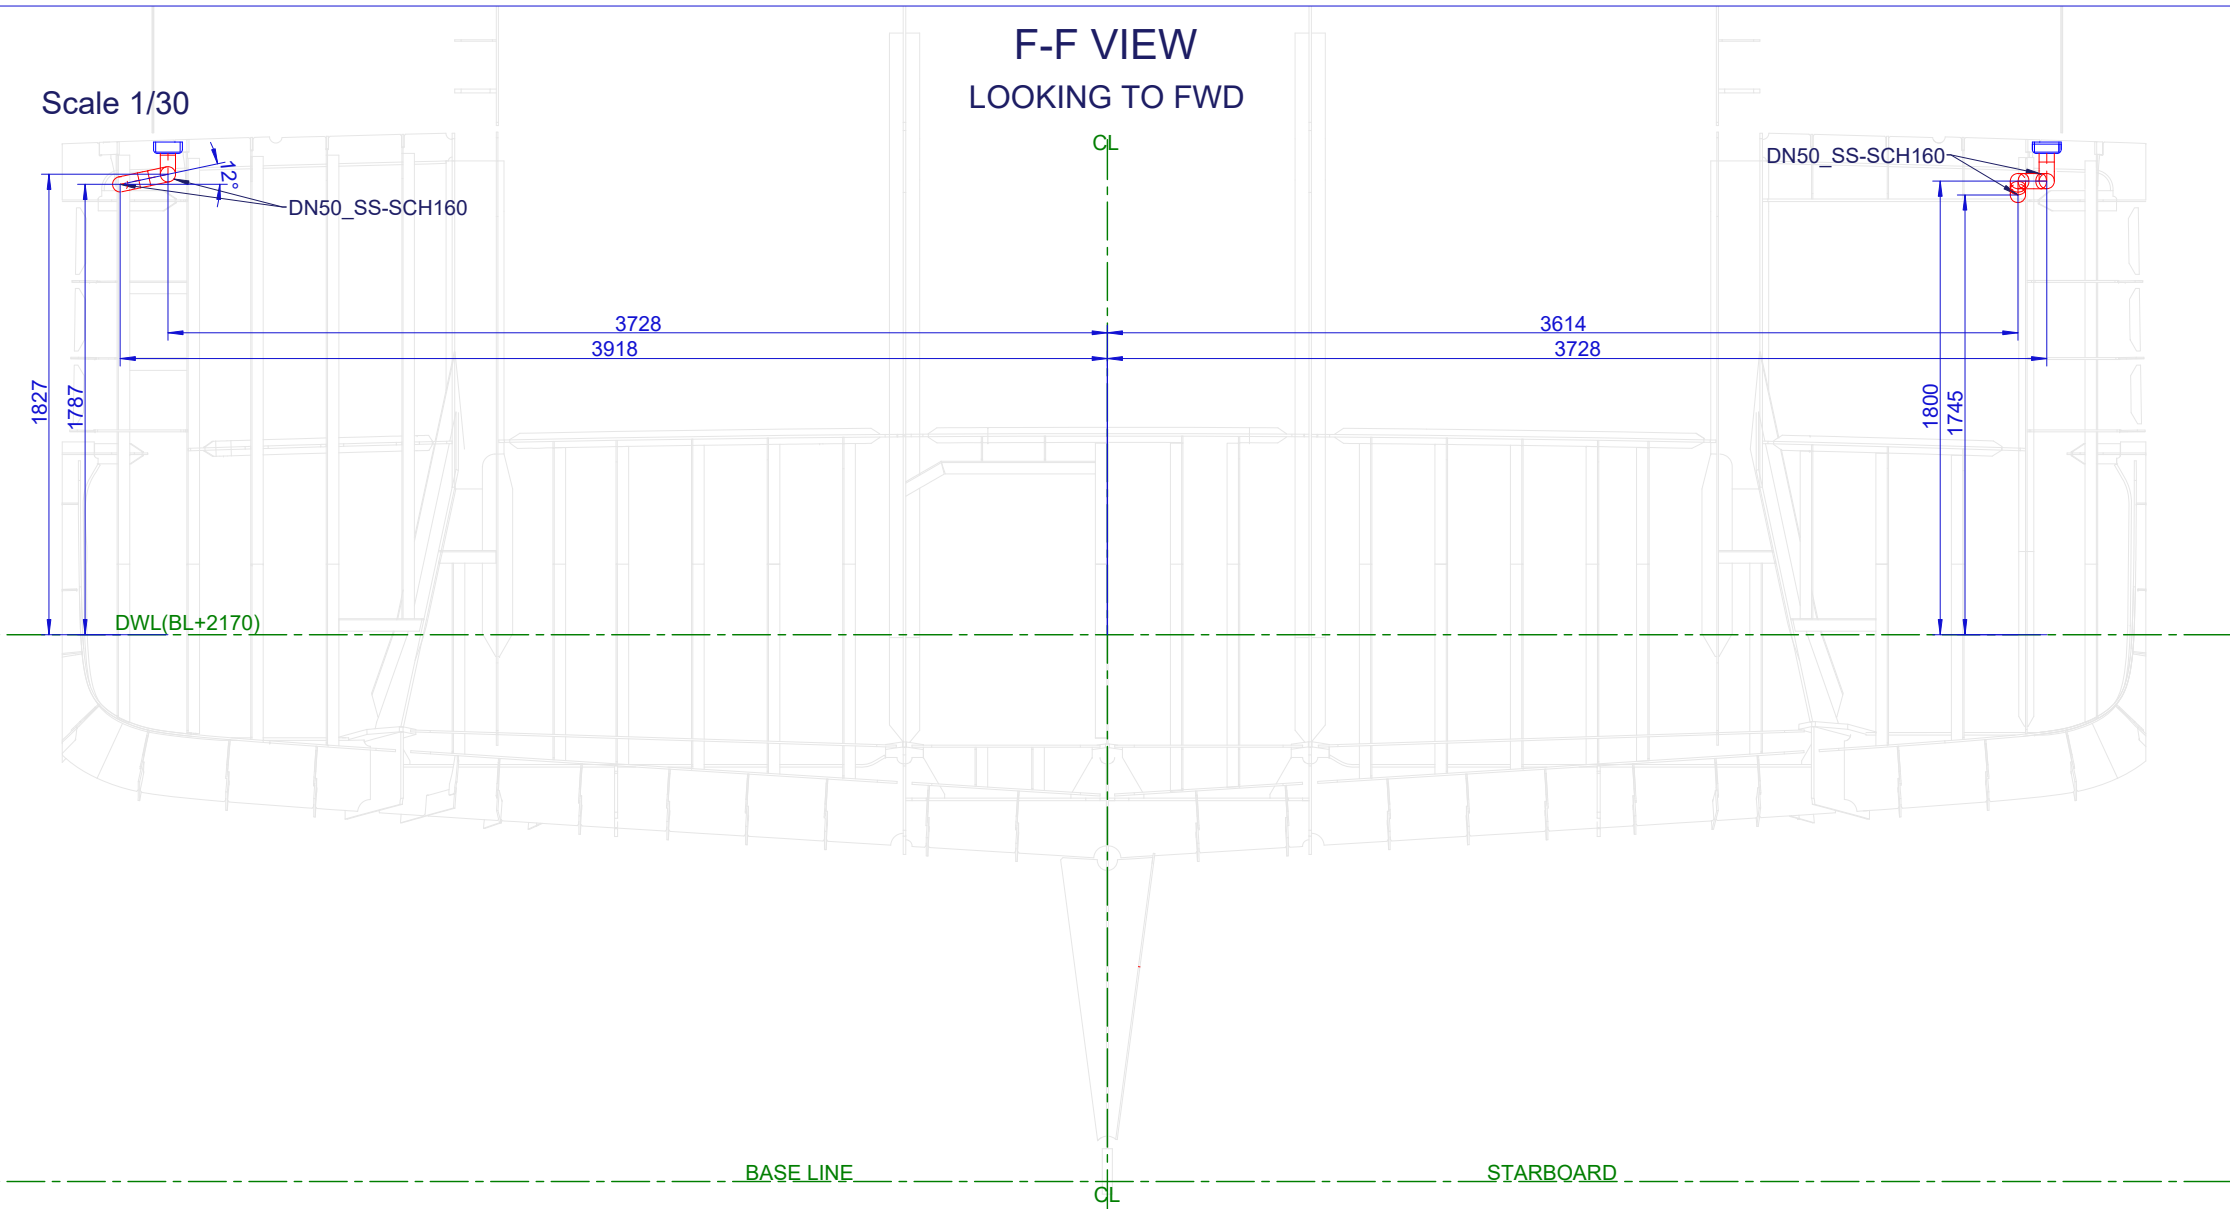
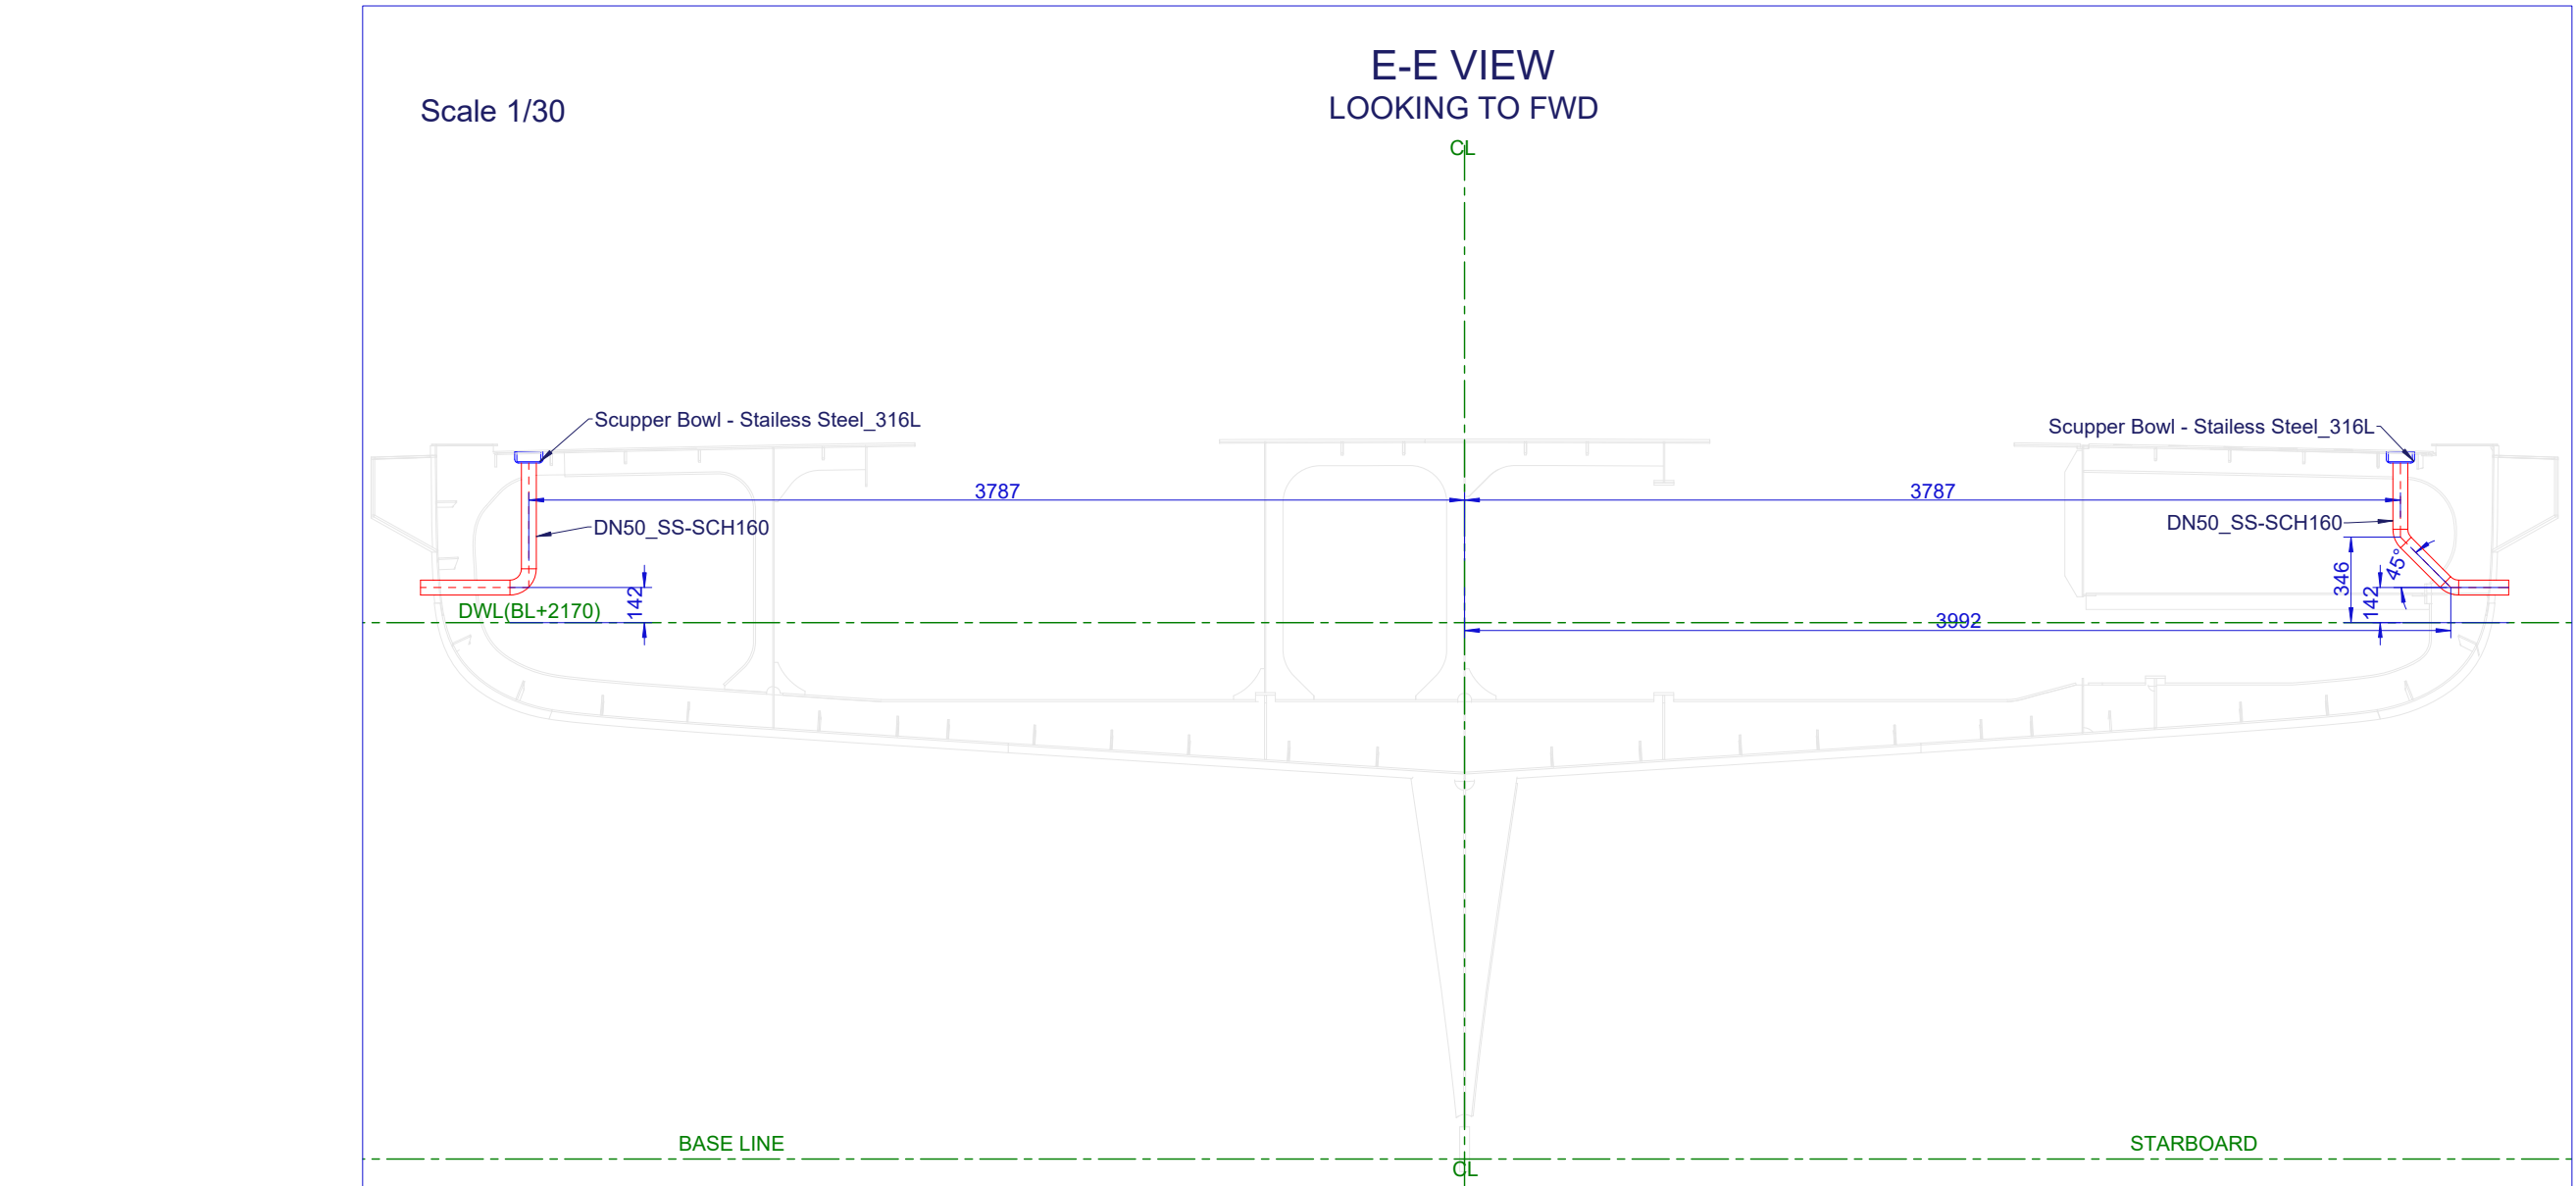
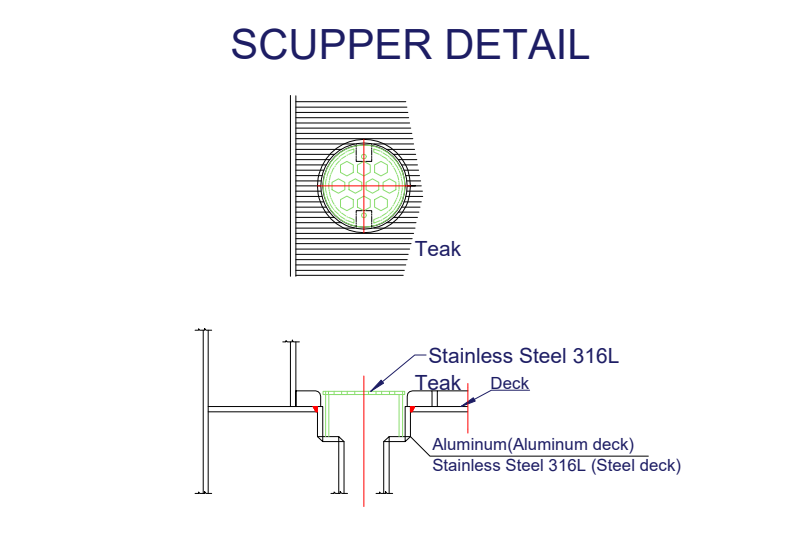
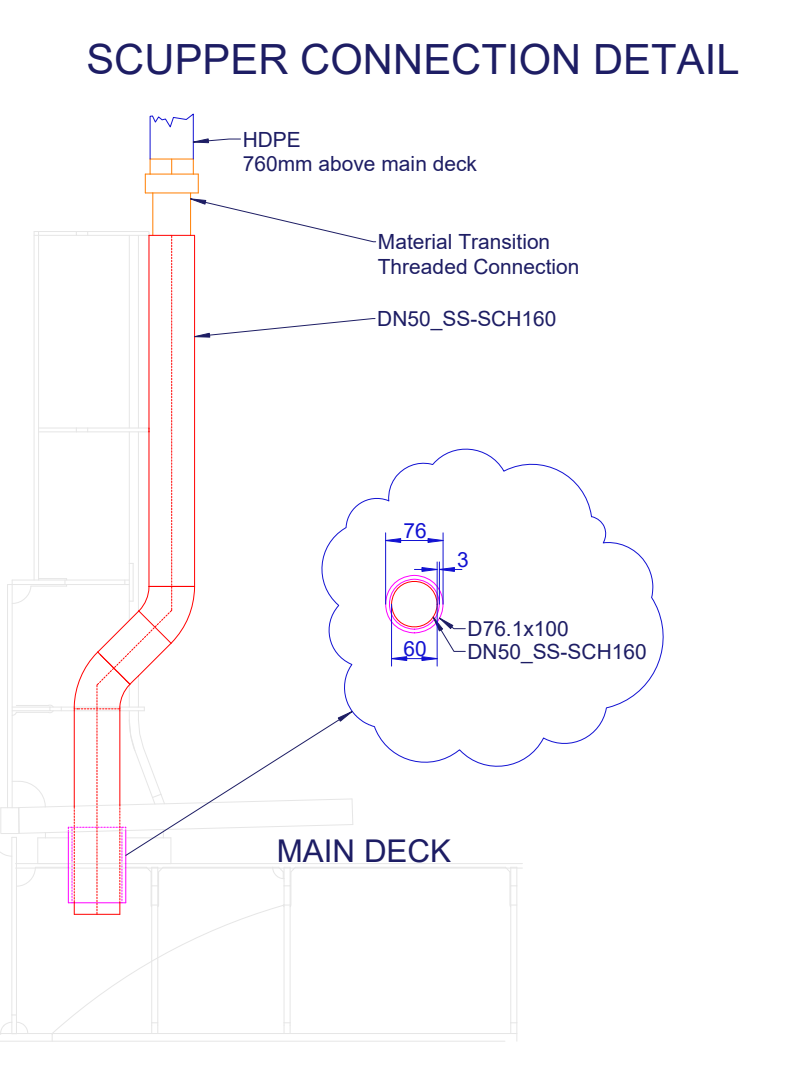
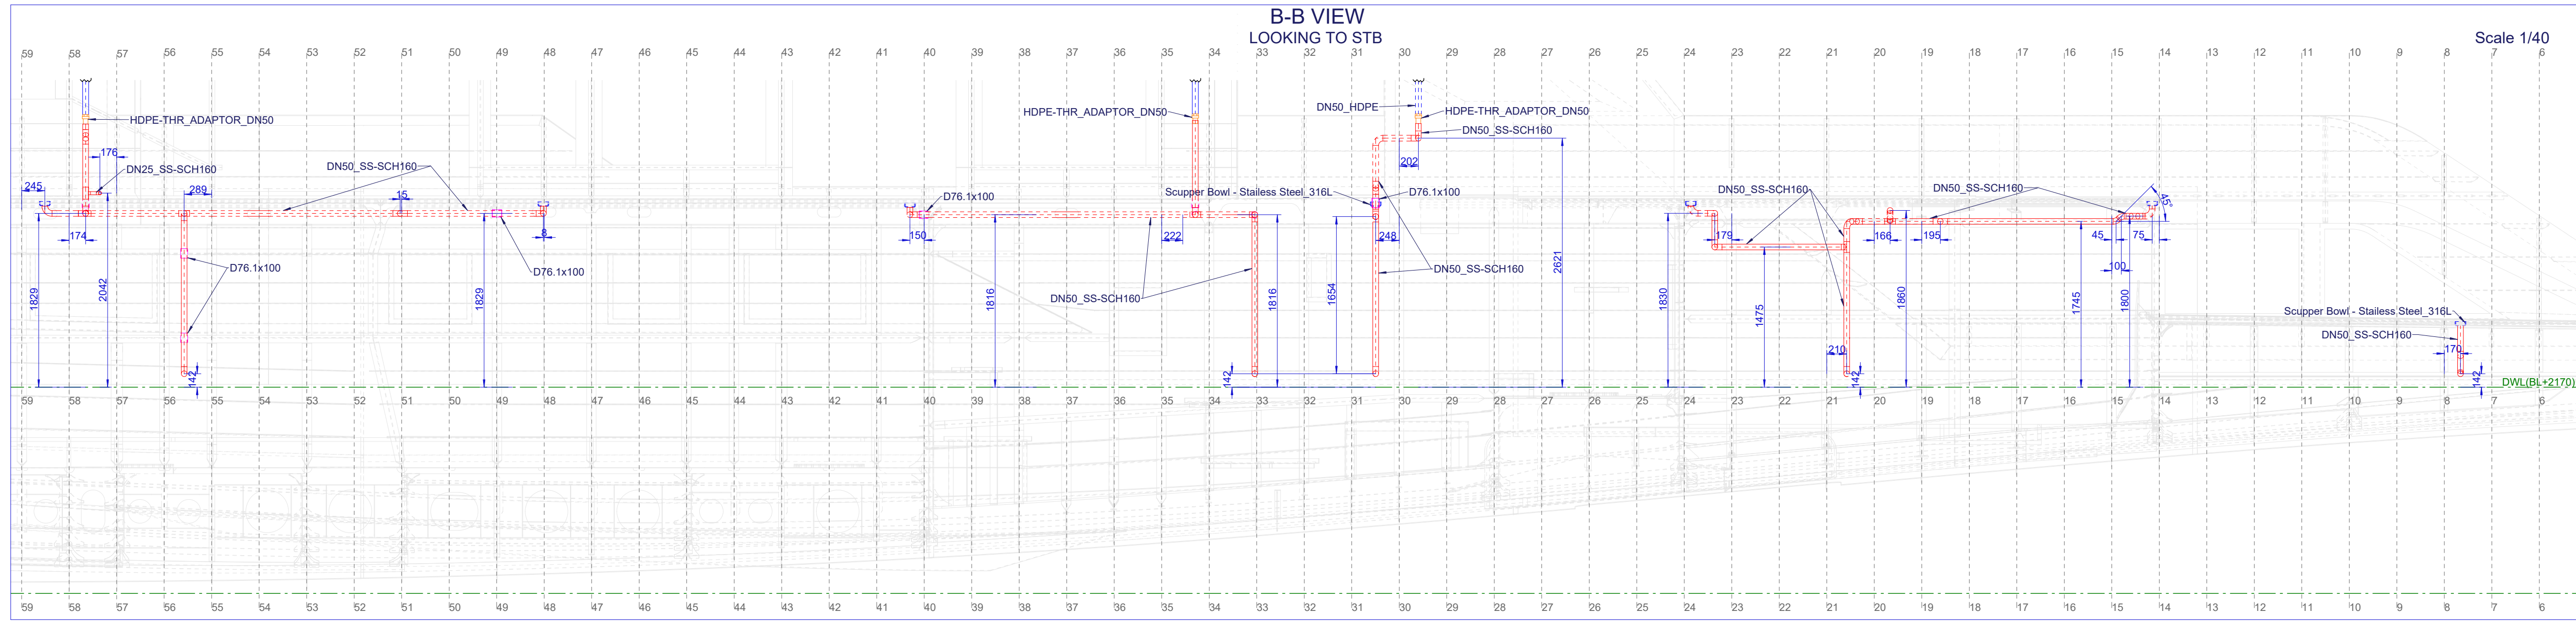
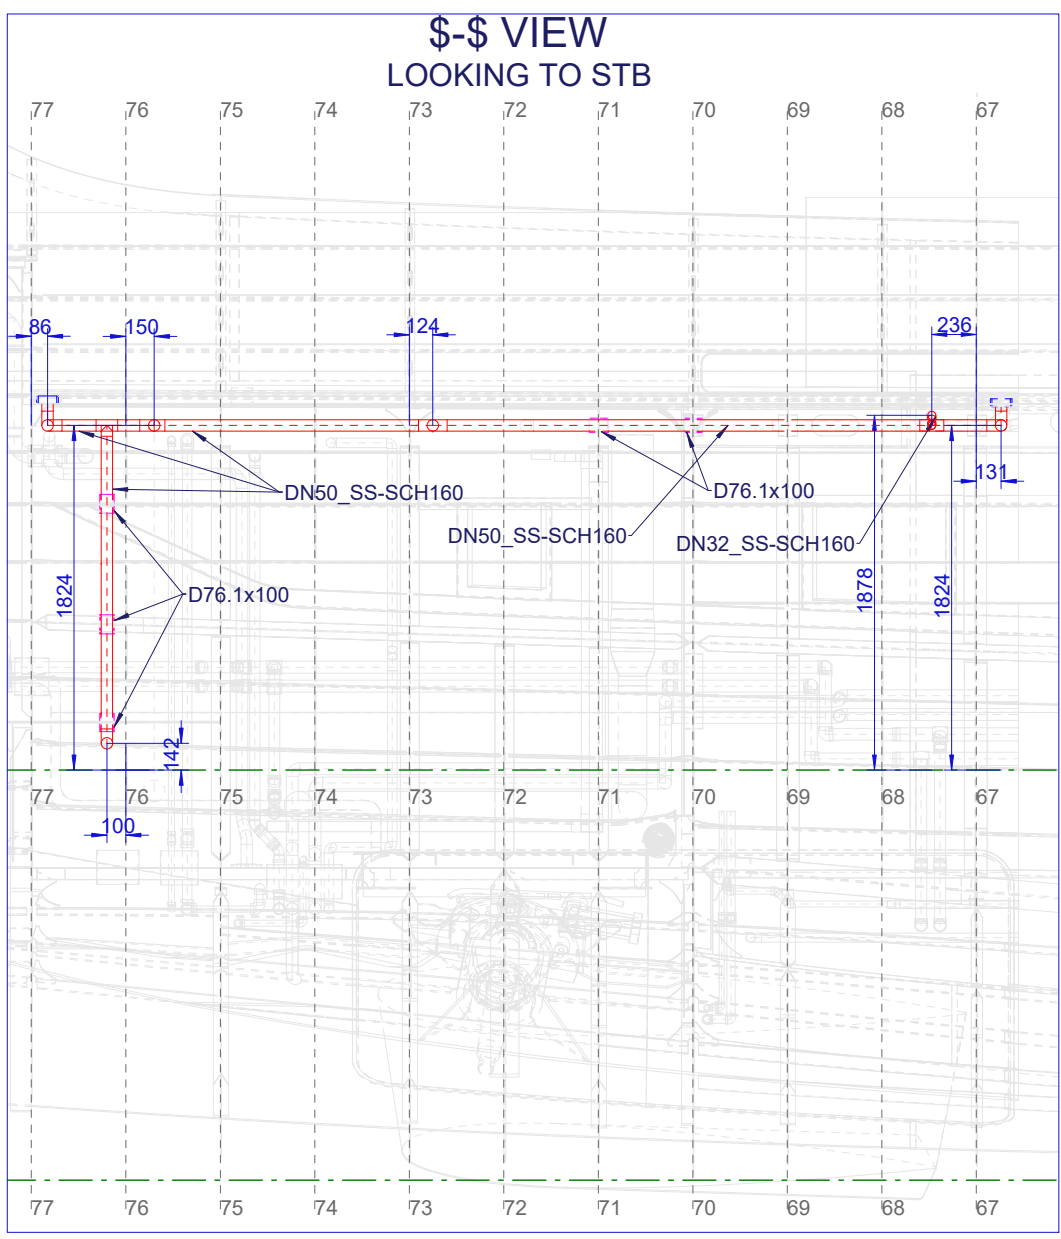
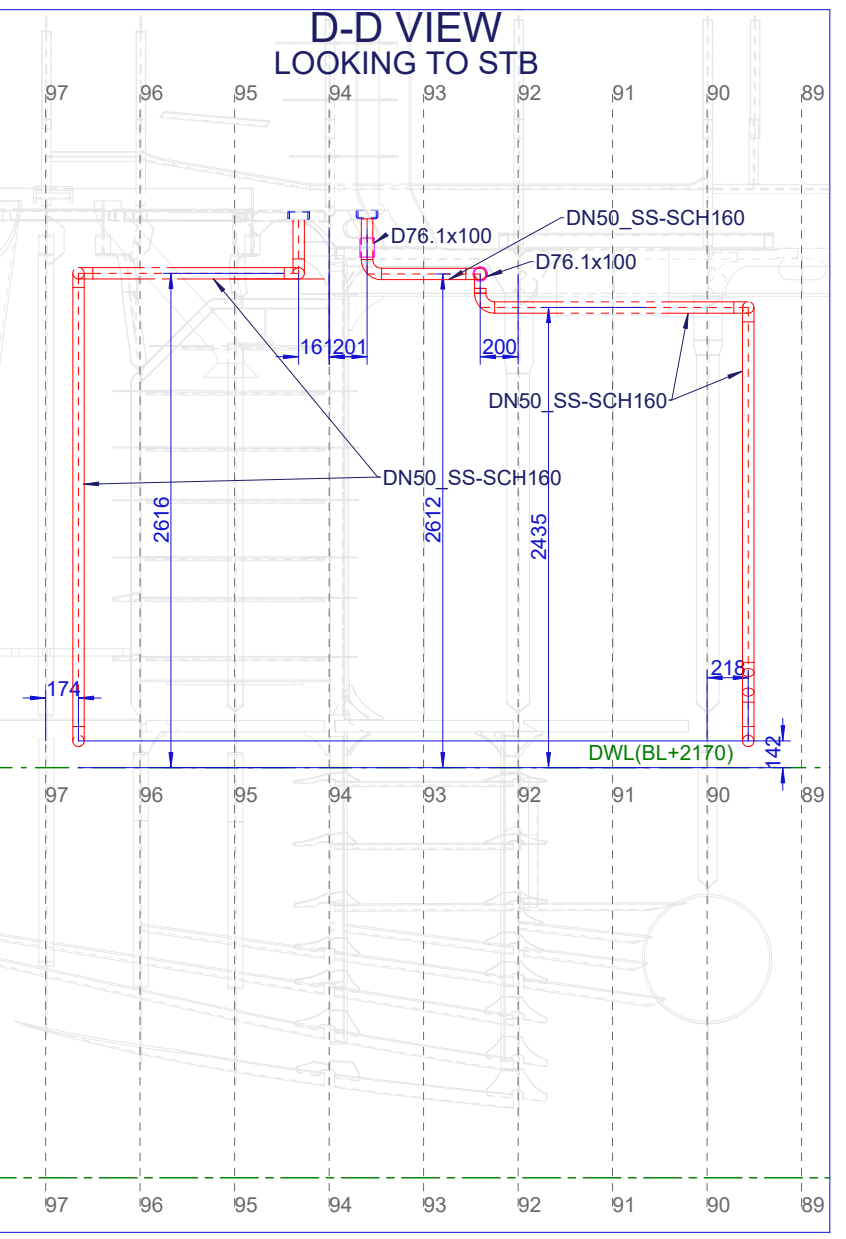
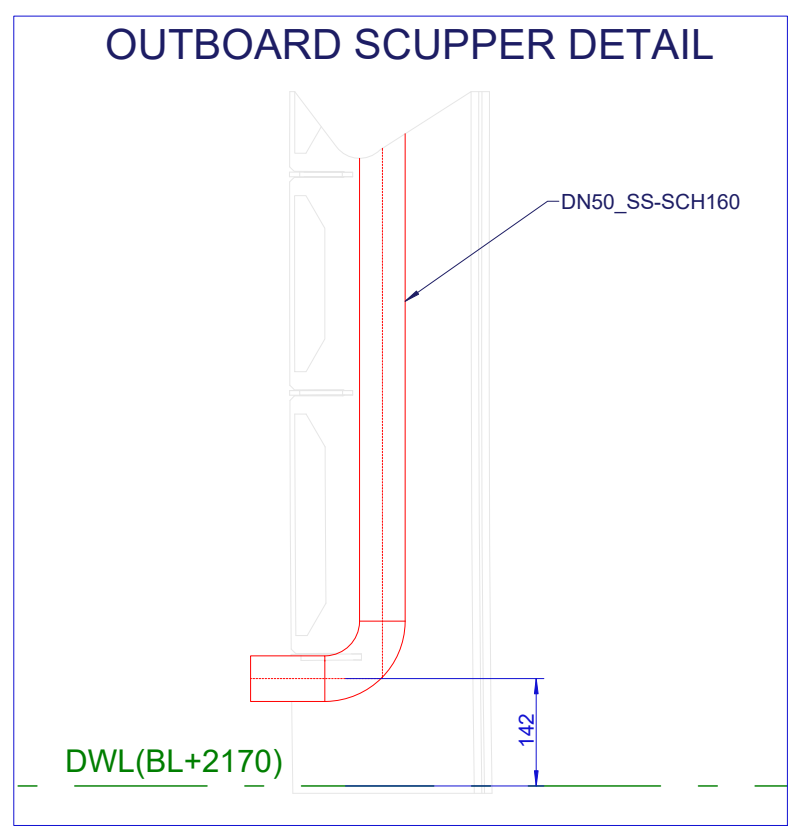
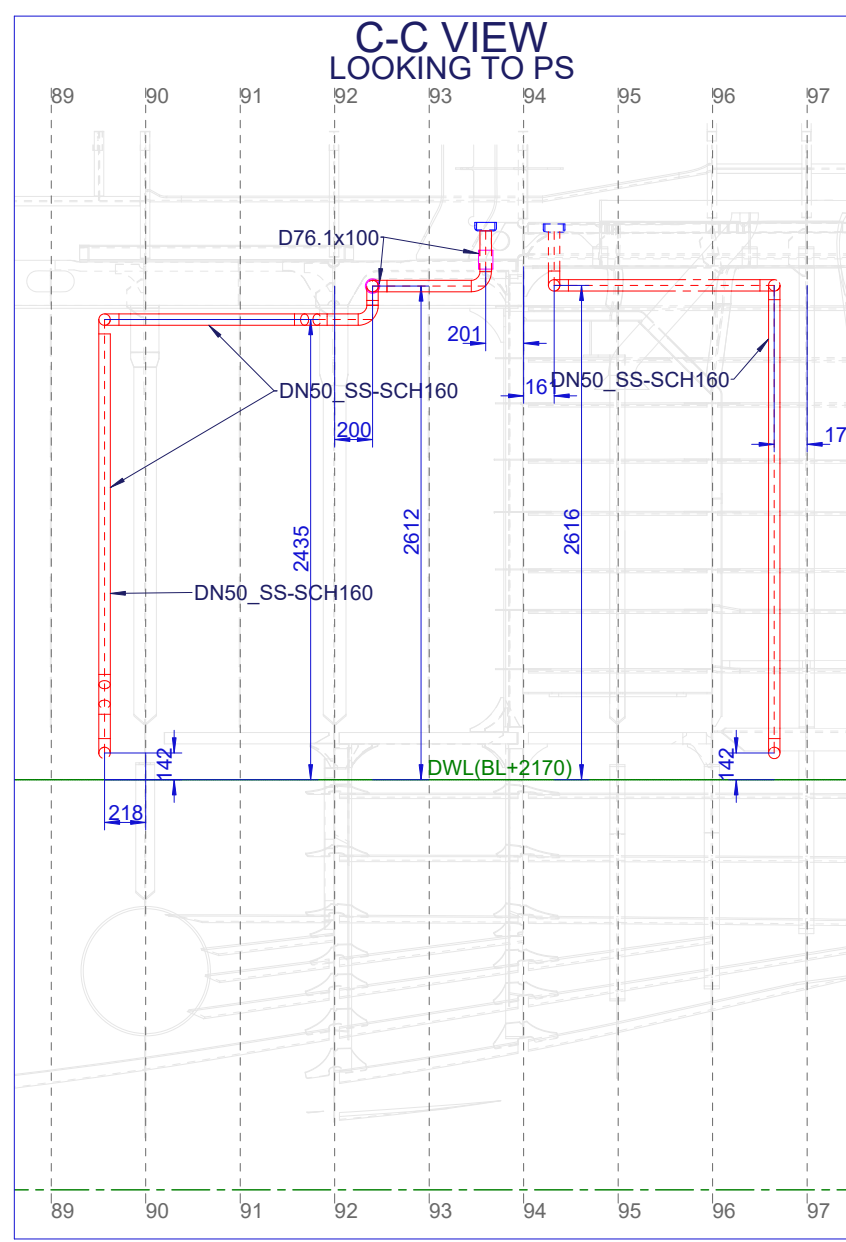
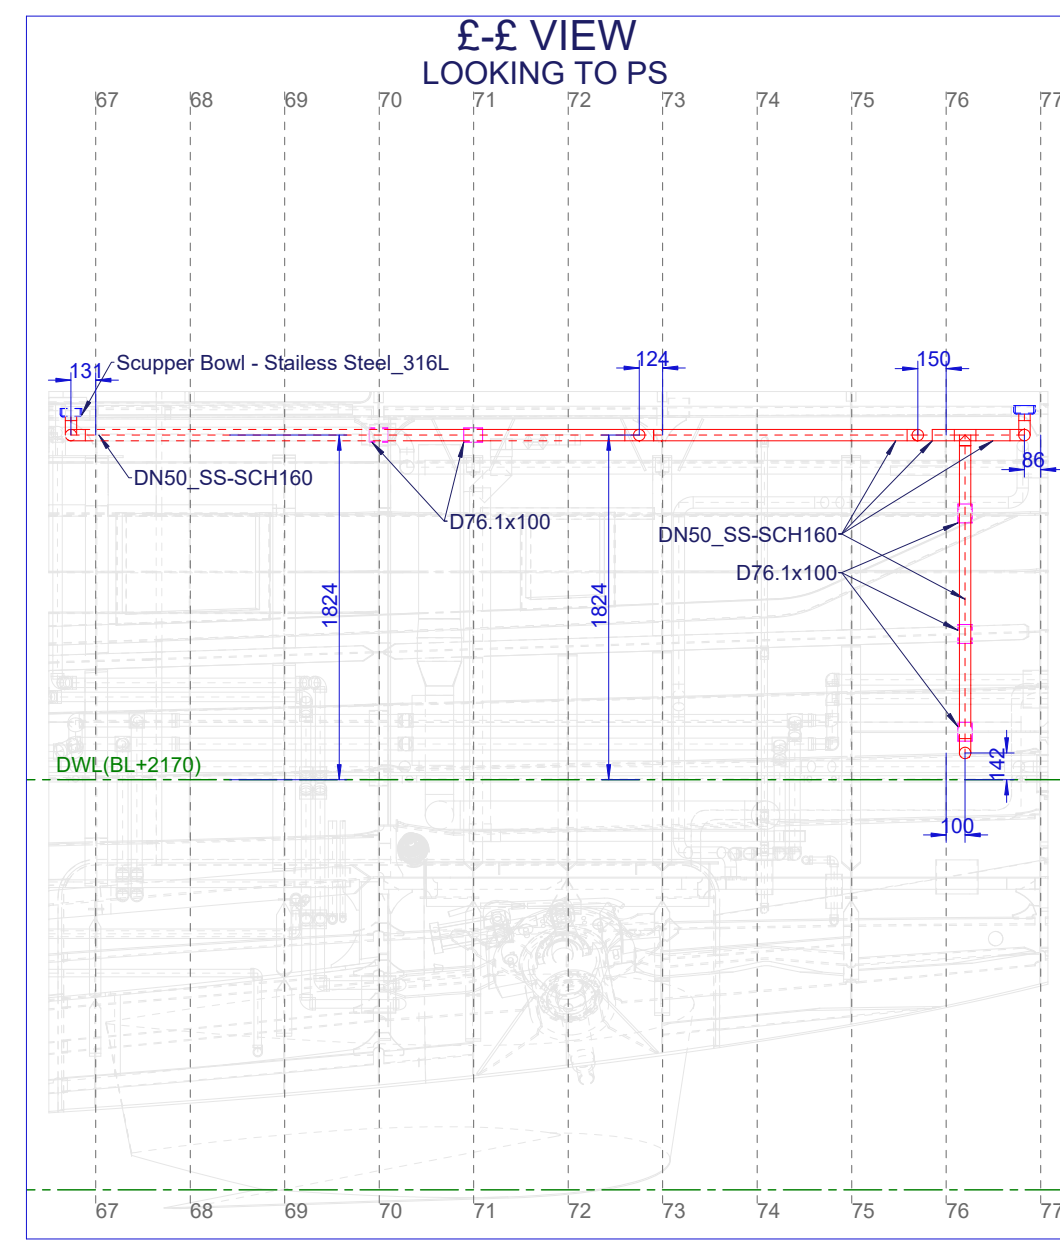
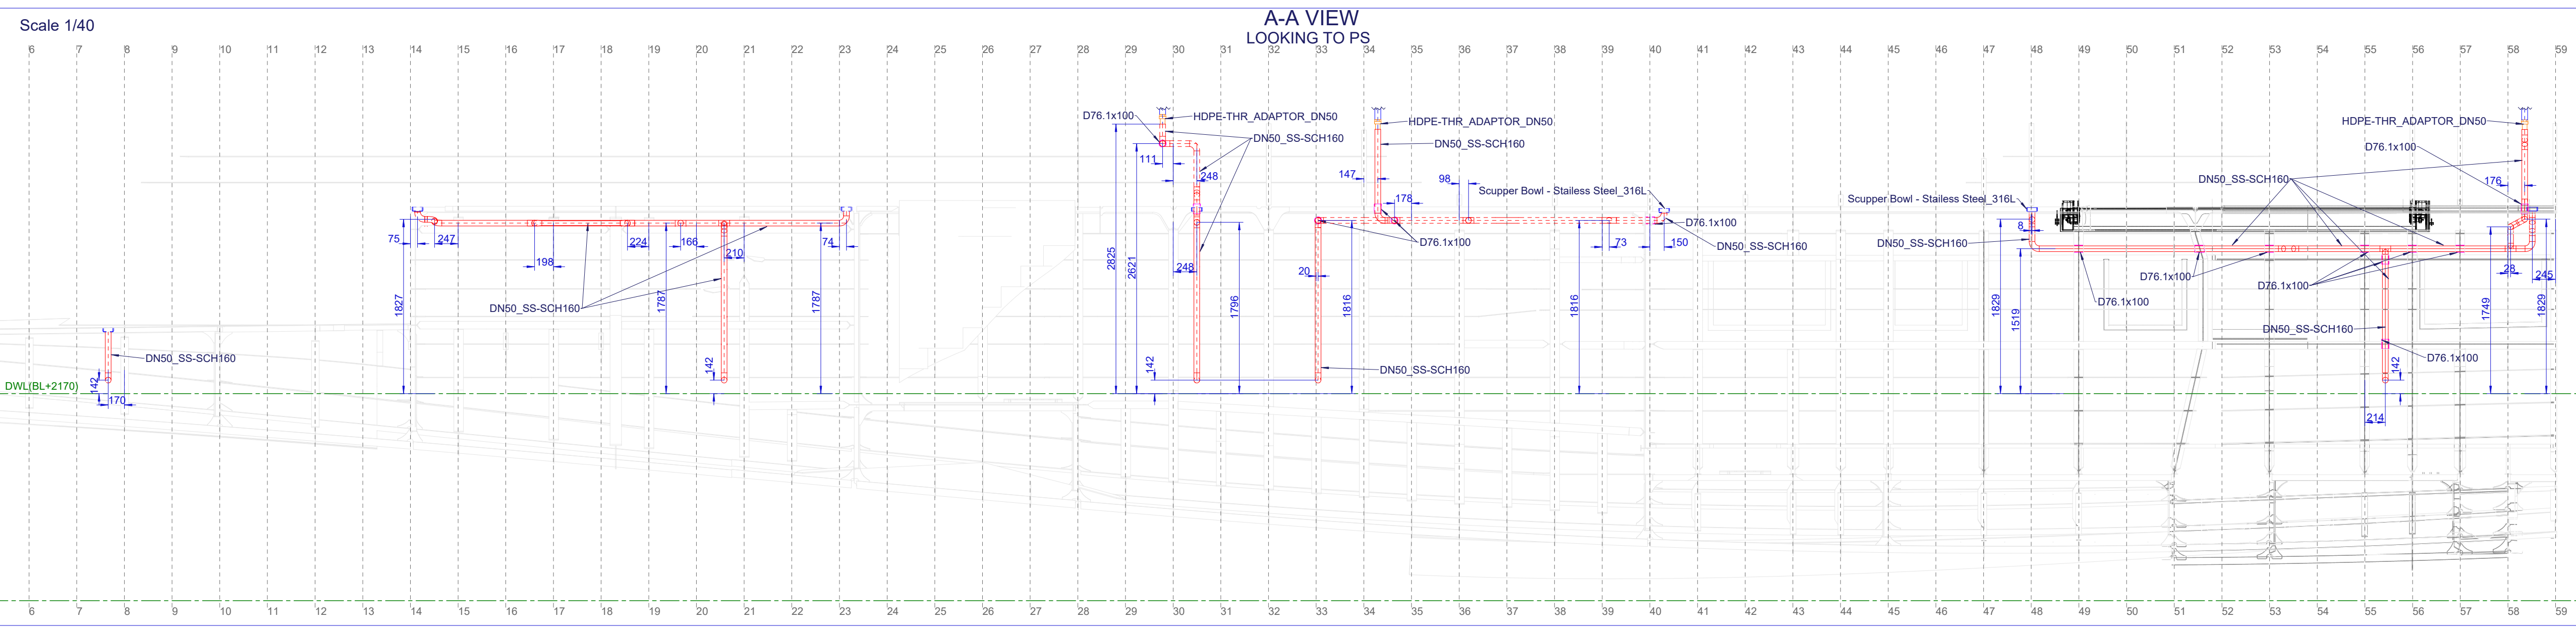
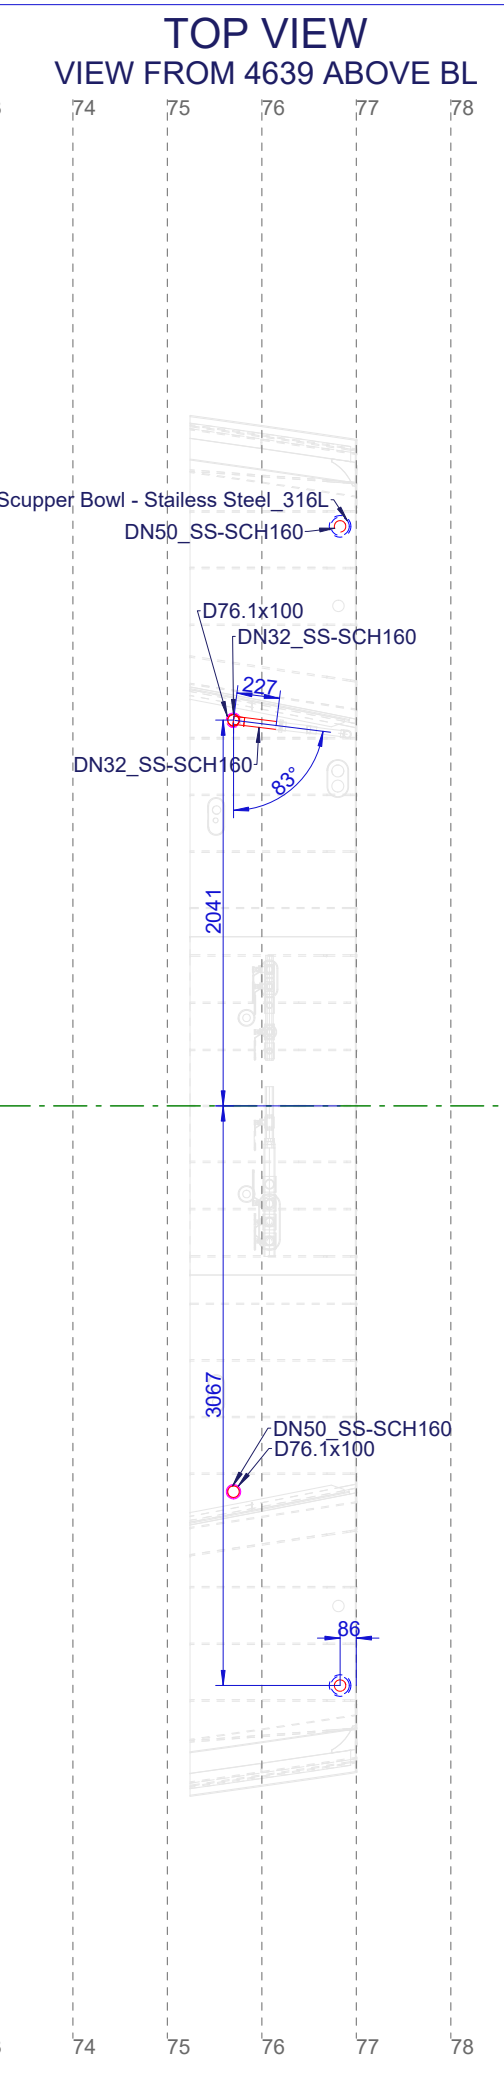
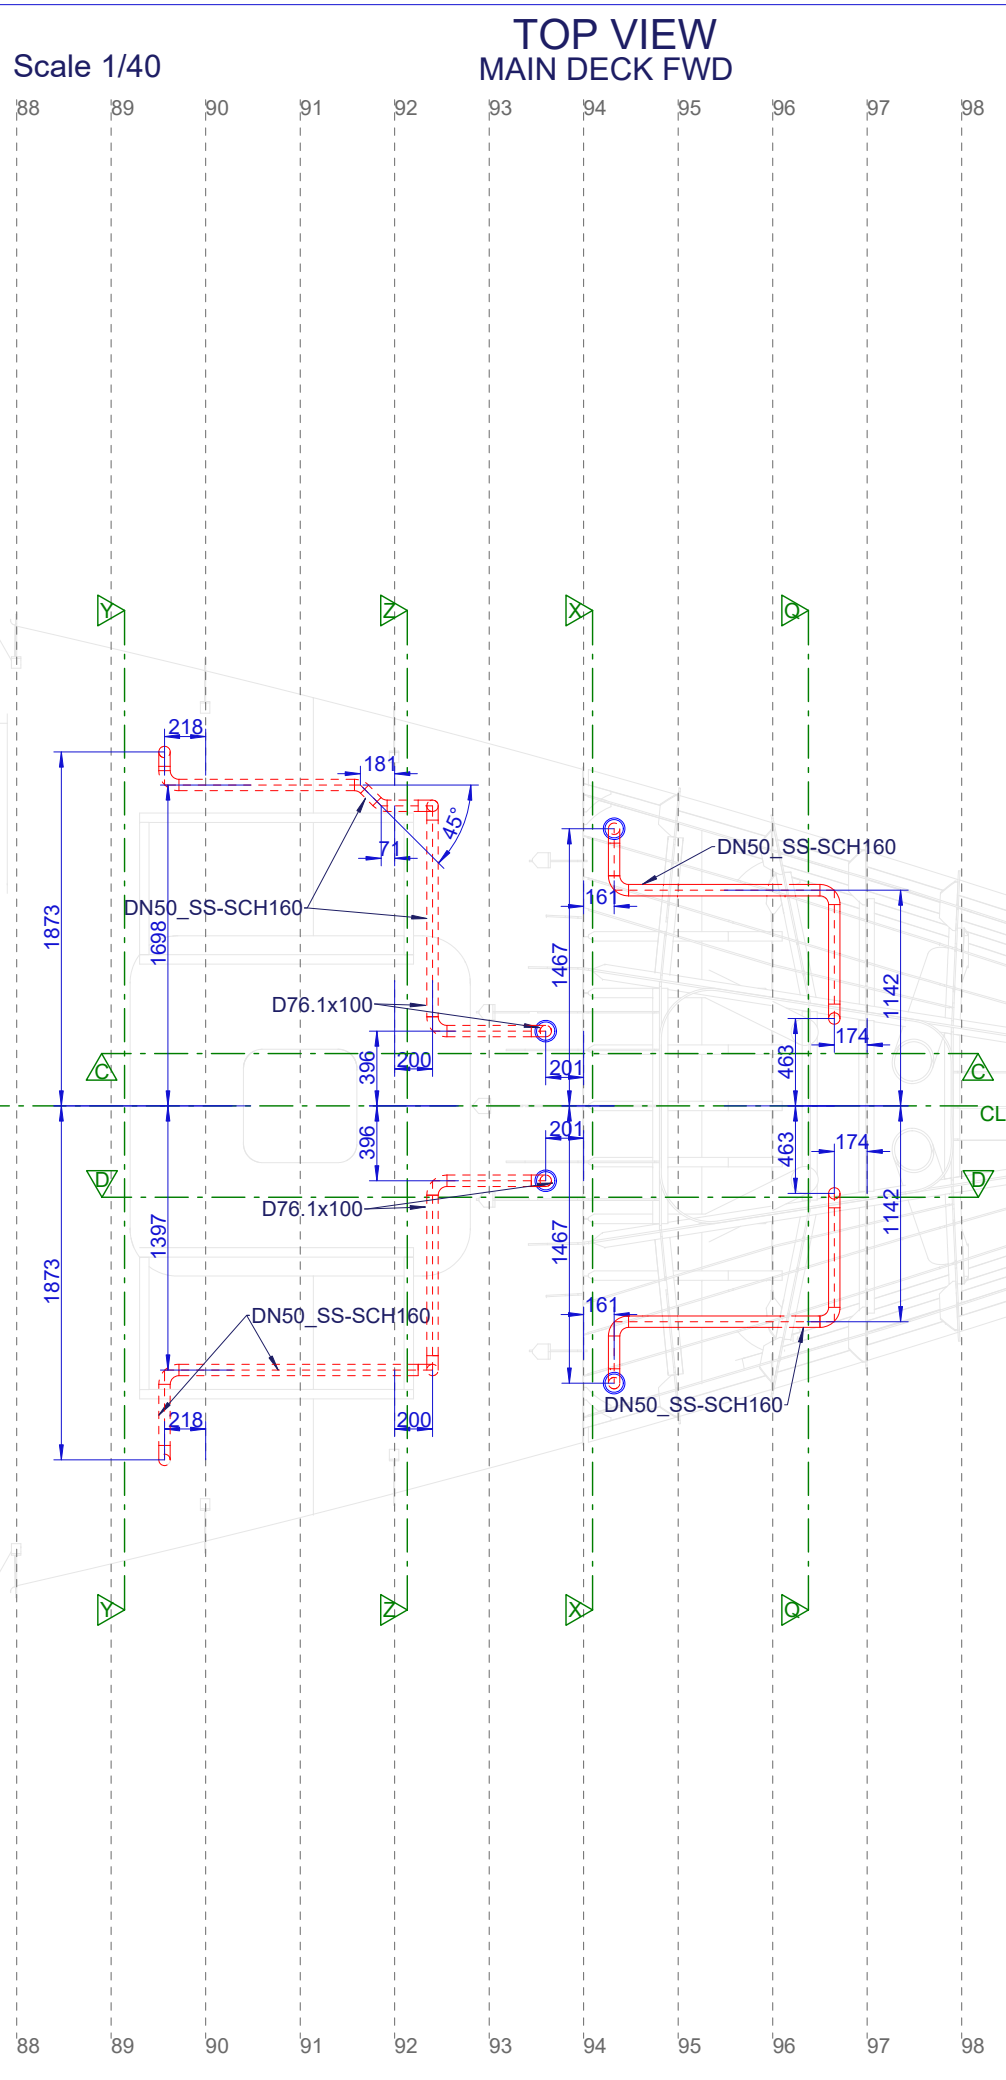
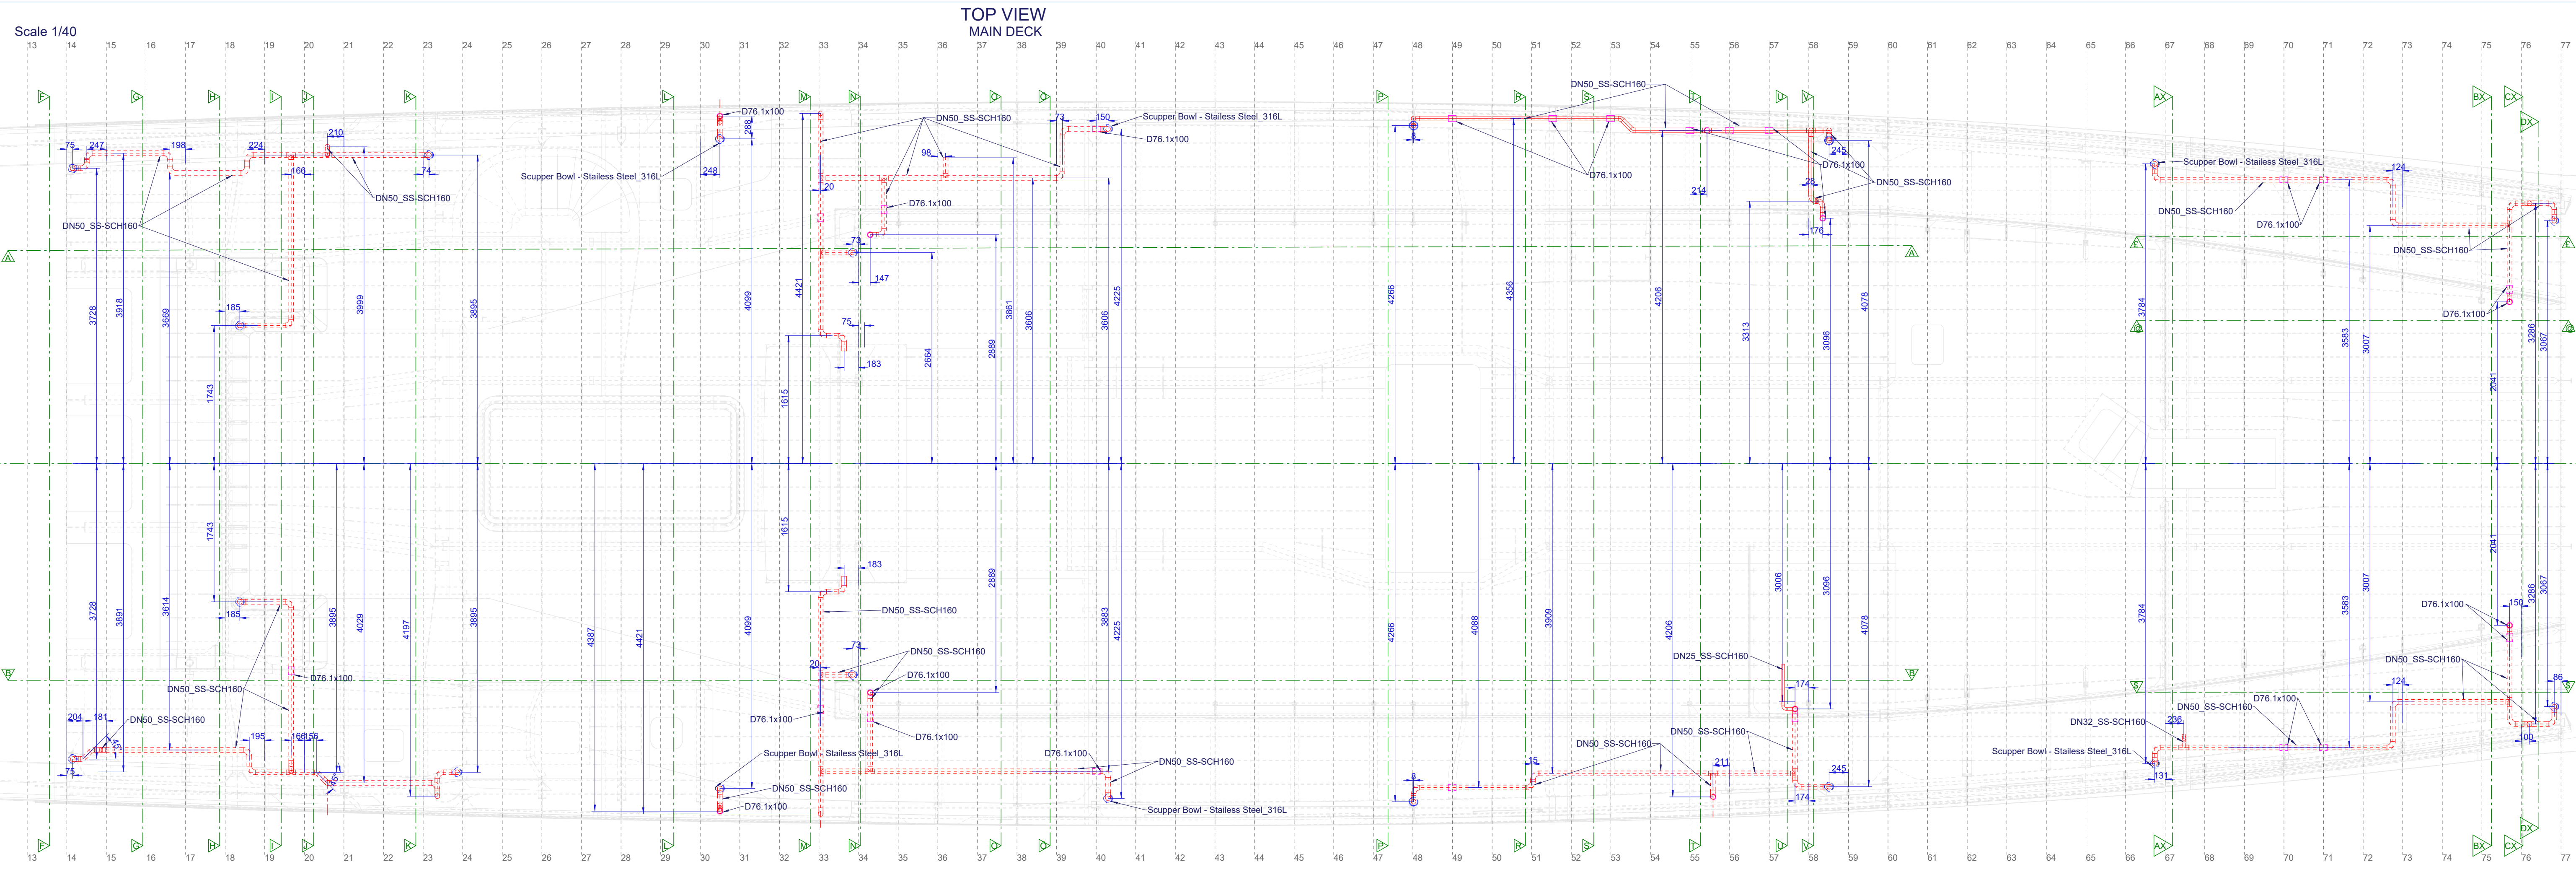


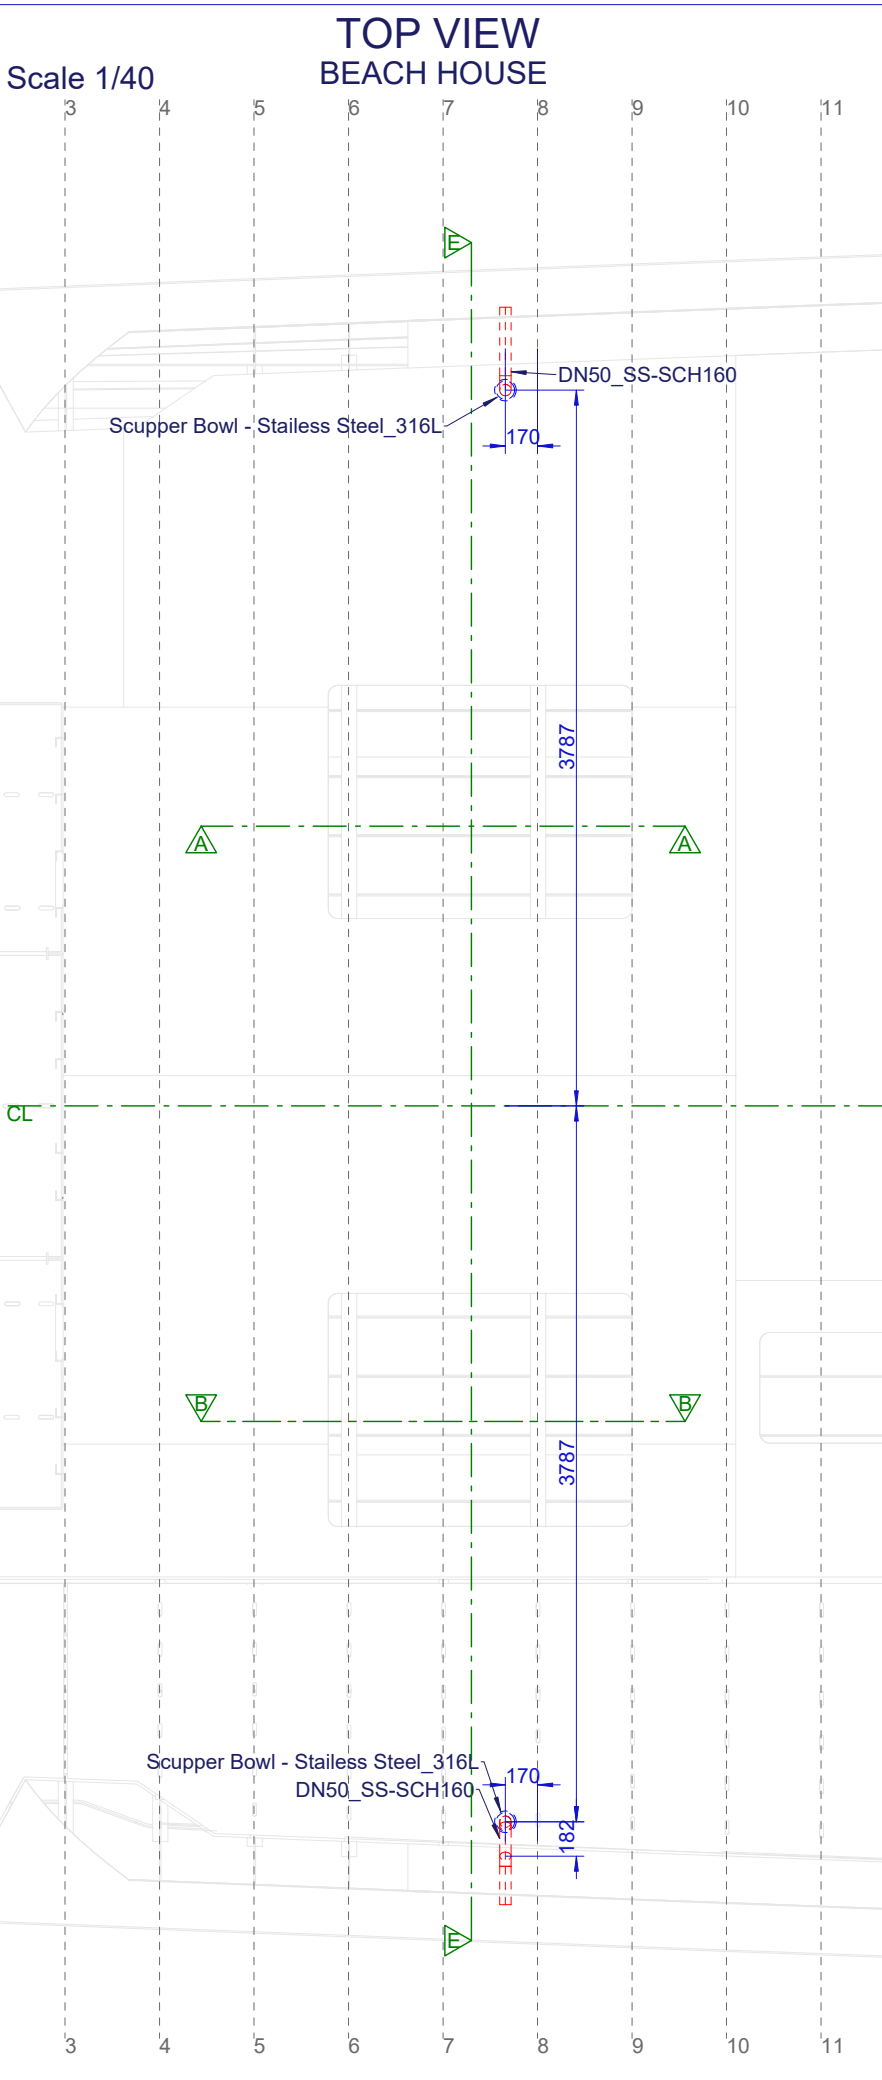

TANIM	ÖLÇÜ	DIS CAP	KALINLIK	MALZEME/TİP	BOYADET
45° DİRSEK	DN50			SS-SCH160	23 ad
45° DİRSEK	DN32			SS-SCH160	2 ad
90° DİRSEK	DN25			SS-SCH160	1 ad
90° DİRSEK	DN50			SS-SCH160	98 ad
BORU	DN32	42,2	6,35	STAINLESS STEEL-SCH160	0,5 m
BORU	DN50	60,3	8,74	STAINLESS STEEL-SCH160	114,4 m
BORU	DN25	33,4	6,35	STAINLESS STEEL-SCH160	0,7 m
TEE	DN50-DN25-DN50			STAINLESS STEEL-SCH160	1 ad
TEE	DN50-DN32-DN50			STAINLESS STEEL-SCH160	2 ad
TEE	DN50			STAINLESS STEEL-SCH160	18 ad

NOTE : Jacuzzi drain line pipe diameter isn't determined by shipyard. Therefore, jacuzzi drain isn't shown in the drawing.